
Measurement Services: Facility Description

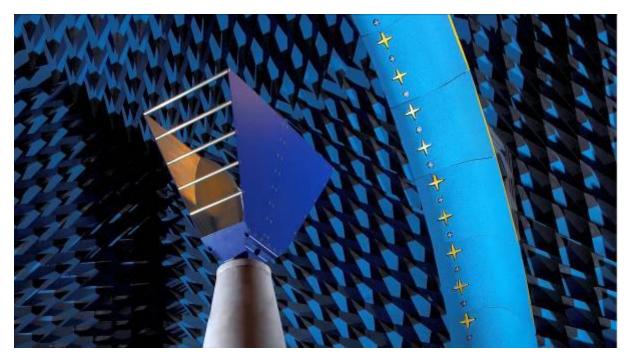

Test system: SG 64

Location: 17 avenue de Norvège, 91140 Villebon-sur-Yvette, France

MEASUREMENT CAPABILITIES

Antenna

 Gain, directivity, beamwidth, cross polar discrimination, sidelobe levels, 3D radiation pattern, Radiation pattern in any polarization (linear or circular), antenna efficiency, either in transmit or receive mode.

OTA

 Total Radiated Power (TRP), Total Isotropic Sensitivity (TIS), Effective Isotropic Radiated Power (EIRP), Effective Isotropic Sensitivity (EIS), GPS sensitivity (TIS, UHIS, PIGS, ICD)


Model	Frequency	certifications			
	Range	CTIA ¹	A2LA/	ISO	ISO 9001
			NIST	17025	
SG 64 standard 18 GHz*	0.4 to 18 GHz	Θ	-	\checkmark	\checkmark

 $[\]sqrt{\text{Compliant}}$ Θ Comparable, for pre-test only - N/A

^{*} For further indications on system performances, please consult our Antenna Measurement and Radome Test Systems catalog (multi-probe technology)

¹ CTIA comparable (but not certified) measurements for GSM, CDMA and WCDMA Over The Air (OTA) Total Radiated Power (TRP) and Total Isotropic Sensitivity (TIS) measurements.

SYSTEM OVERVIEW

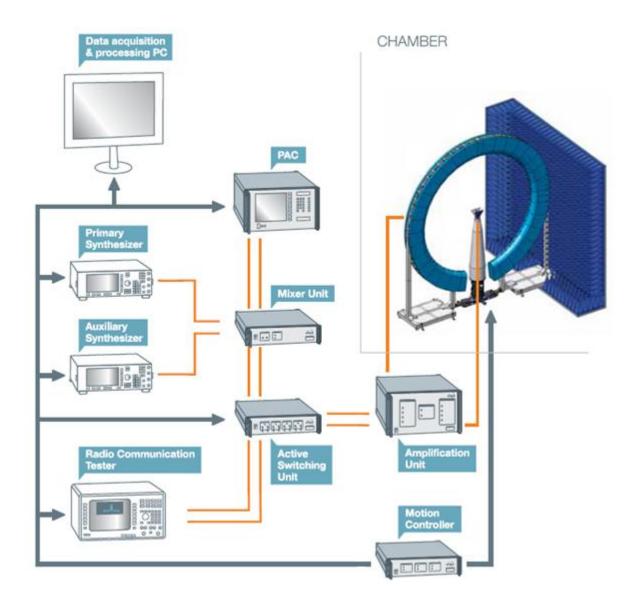

- Only Azimuth rotation required to perform a full 3D measurement
- Universal masts available for easy mounting
- Broadband reference antennas
- OTA hardware equipment available (head phantoms, positioner...)

©MICROWAVE VISION 2010



